

STAINES PLANT TRAILER WITH SPRUNG RAMPS

Our Staines sprung ramp Plant trailer is manufactured using a heavy duty chassis and a sturdy drawbar with 38mm treated timber floor as standard. The spring assistance on our sprung ramps aids in the manual handling of lowering the ramps to the floor. The angle set on the beavertail will allows for a more gradual tracking angle, for equipment up to 4 ton. Available as a tandem or tri-axle.



STANDARD PLANT TRAILER SPECIFICATION

Carrying Capacity:	22,000 kg - Tandem 32,000 kg - Tri	Tyres:	Mini super singles 445/45 R19.5
Floor Type:	38mm treated timber floor	Braking:	Hydraulic braking system
Trailer Chassis:	250 x 150 x 8mm RHS	Paint:	Twin pack, high gloss polyurethane paint
Axles:	Commercial 10 stud axles c/w 420x180mm brakes	Fixtures:	- Front fixed headboard - Under run bar & lockable toolboxes - 3T ring hitch - Rope hooks - Rear wheel mudflaps - Ratchet commercial parking brake - Parallel flanged channel side rails
Suspension:	Commercial parabolic mono leaf		
Lighting:	- Fully road legal LED lighting kit - Rear stop/tail/indicator and flashing light - Front and side marker lights - Number plate lamp and holder		




SPRUNG RAMP SPECIFICATION

Tracking max weight:	4 ton	Ram:	Spring assisted ram to help assist you with lowering the ramps towards the floor.
Material finish:	Galvanized finish with 4.5mm checker plate floor and solid bar horizontally splayed to aid in tracking up the ramp.	Benefits:	Best suited for tracking small machinery or agricultural vehicles. Beavertail angle allows for a more gradual tracking angle.

OPTIONAL EXTRAS / UPGRADES

- Keruing Hardwood and checker plate (T-Floor)
- 4.5mm pressed checker plate flooring
- Air & Hydraulic brakes (load sensing air only)
- Galvanised front lades/ladders
- Lashing links in the floor bed
- Sprung drawbar
- Swivel hitch or K80 ball hitch
- Fitted rear flashing light
- Hydraulic load sensing valve
- Outriggers

STAINES PLANT TRAILER WITH SPRUNG RAMPS

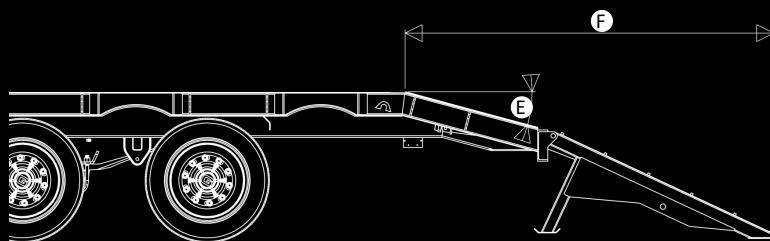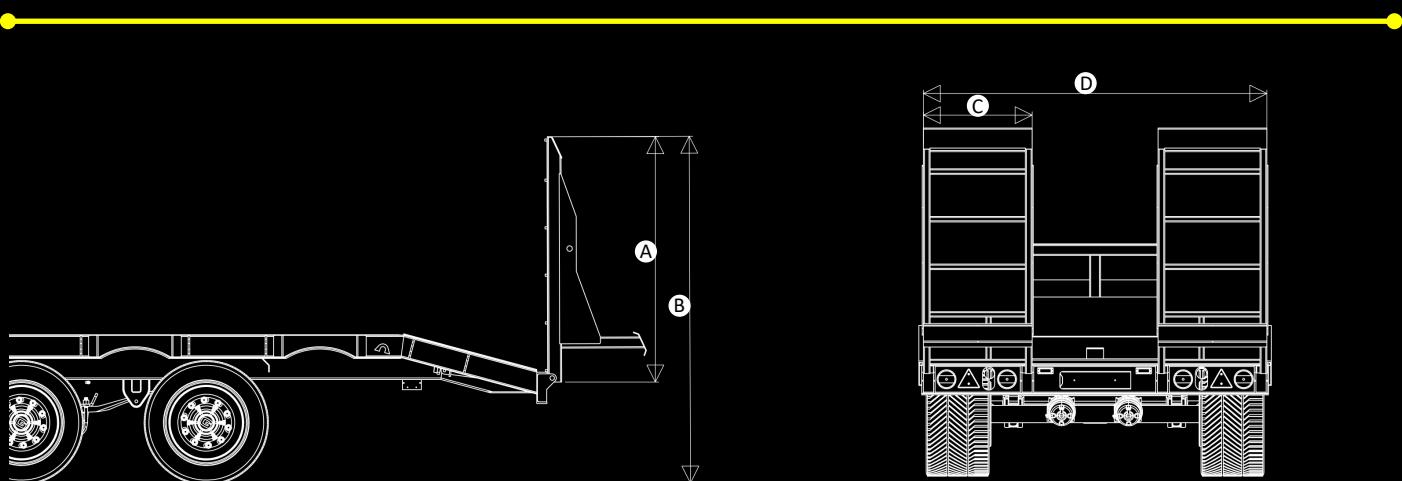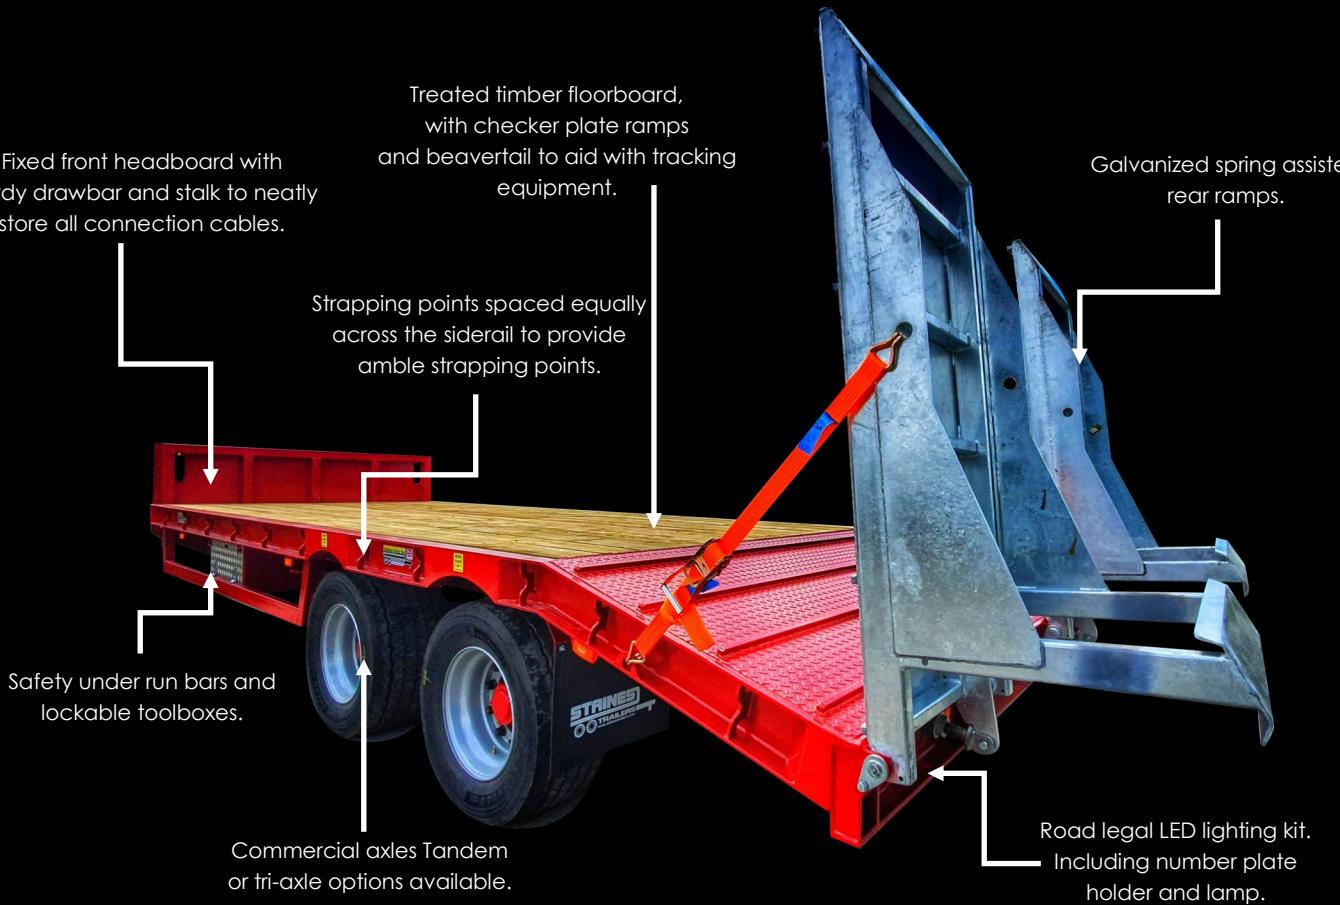

<u>Sprung Ramps</u>	<u>Ref</u>
Ramp Height	A 1805mm
Overall Height	B 2550mm
Ramp Width	C 800mm
Overall Width	D 2525mm
Tracking angle	E 15deg
Folded ramp Length	F 2710mm