

STAINES SITE DUMPER

Our Staines Standard Site Dumper features a heavy duty RHS chassis, mounted on commercial 10 stud axles and a tandem suspension. To help protect from wear and tear our Staines dumpers are built with 5mm sides and 8mm floor sheets, for extra durability check out our Hardox Tube Dumper. An extensive tipping angle is achieved via our 3 stage hydraulic cylinders, making them the perfect tipping dumper.



STANDARD SITE DUMPER TRAILER SPECIFICATION:


| | | | |
|---------------------------|---|------------------|--|
| Carrying Capacity: | 16,000 kg | Tyres: | Super singles 385/65 R22.5 |
| Cubic Capacity: | 7m ² | Braking: | Hydraulic braking system |
| Trailer Chassis: | 250 x 150 x 8mm RHS | Rear: | Gravity operated door, with auto locking catch |
| Suspension: | Commercial parabolic monoleaf | Tipping: | Twin 3 stage tipping rams |
| Axles: | Commercial 10 stud axles c/w 420x180mm brakes | Paint: | Twin pack, high gloss polyurethane paint |
| Lighting: | <ul style="list-style-type: none"> - Fully road legal LED lighting kit - Rear stop/tail/indicator - Front and side marker lights - Number plate lamp and holder | Fixtures: | <ul style="list-style-type: none"> - Scow back - Mudguard and mudflaps - Rope hooks - Ratchet commercial parking brake - Recessed rear light with protective case |

OPTIONAL EXTRAS / UPGRADES

- Hydraulic tailgate
- Under run bars and lockable storage box
- Air & Hydraulic brakes
- Fitted rear flashing light
- Sprung drawbar
- Bolt on ring hitch, K80 ball hitch or swivel hitch options
- ABS
- 560 / 45 R22.5
- Hydraulic load sensing valve
- 445/45 R19.5
- 13 core lighting upgrade
- Rear galvanized crash bar

To view our full range of Dump Trailers please get in touch or visit our website to find out more.

STAINES SITE DUMPER

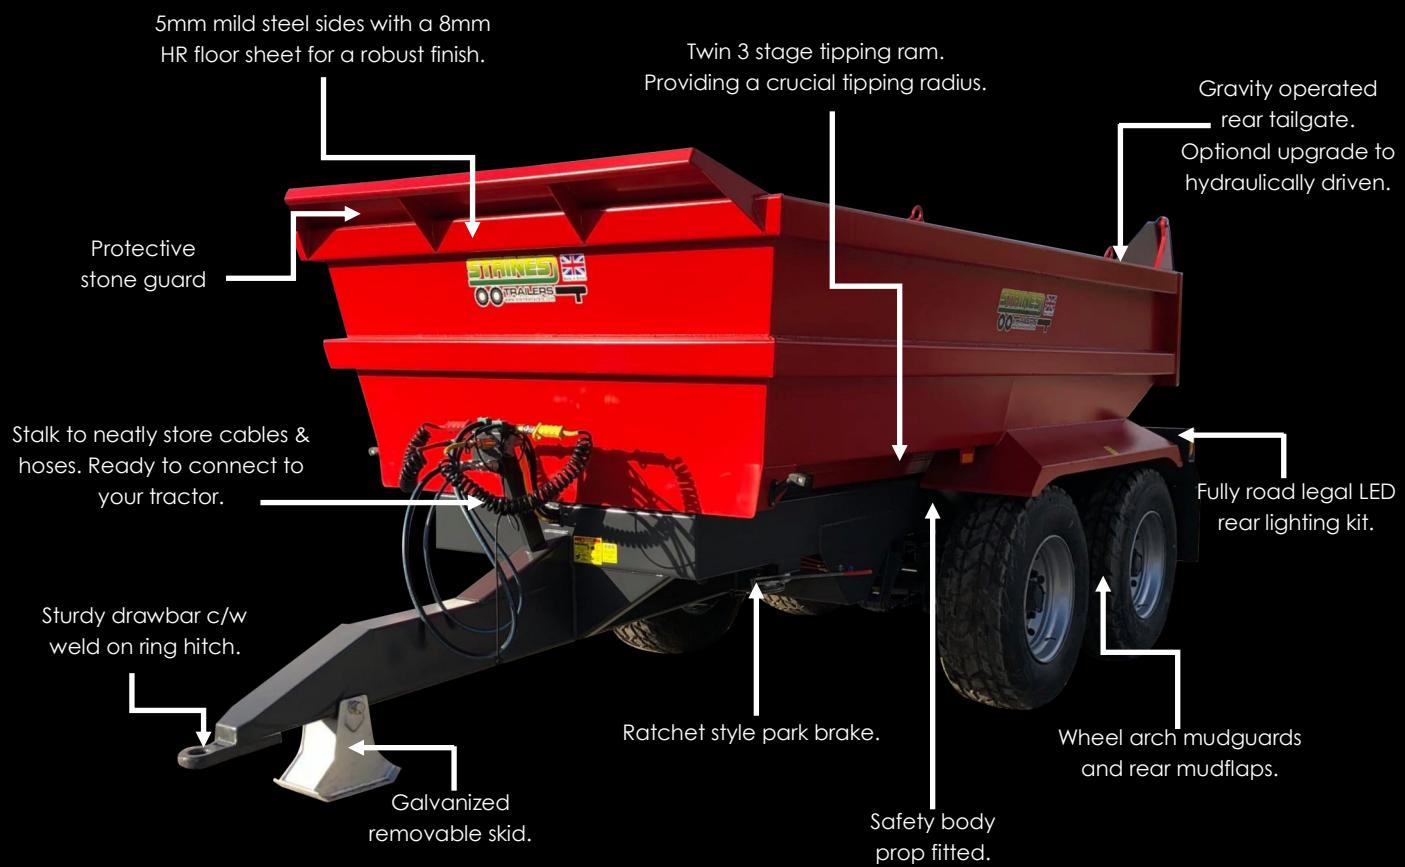

| SSD | Ref |
|---------------------------|------------|
| Body Length | A 4035mm |
| Overall Length | B 5570mm |
| Body Height | C 1050mm |
| Overall Width | D 2500mm |
| Overall Height | E 2450mm |
| Max Tipping Height | F 2920mm** |

